## ingenico

# DESK/1700

Provide customers with autonomy and security at the check-out





## Easy to integrate into any counter-space and reliable, the Desk/1700 is an intuitive PIN Pad speeding customers through check-out.

## Optimized for payment

- All payment methods accepted
- An easy-to-identify contactless reader
- A large keypad for a seamless the PIN entry

## Easy connectivity to AXIUM DX4000 Desktop thanks to one single connector


#### Robust and reliable device

- Display with glass lens
- High-performance card & swipe insertion

### Compact design to fit easily on any counter

## Highest security

- PCI PTS v6
- Optional PCI certified privacy shield

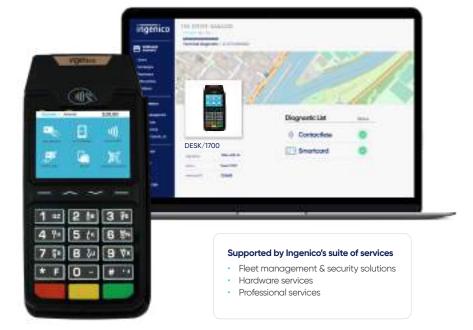

## **Specifications**

OS		Telium TETRA	~
Memory	• Internal	• 256 MB Flash, 128 MB RAM	~
Processor	<ul> <li>Application &amp; Crypto processor</li> </ul>	Cortex A7	~
Card readers	<ul> <li>Magnetic card reader</li> <li>Smart Card</li> <li>Contactless</li> </ul>	<ul> <li>ISO 1/2/3 (500K reads lifespan bi-directional swiping)</li> <li>EMV L1 (500K reads lifespan)</li> <li>EMV Contactless L1 3.0 certified</li> </ul>	* * *
Display		<ul> <li>2.8"backlight, glass lens, QVGA (320x240 pixels)</li> </ul>	~
Keypad	<ul> <li>Physical keys</li> </ul>	<ul> <li>15 keys, raised markings, backlit</li> <li>4 function keys</li> </ul>	× ×
Audio	Buzzer		~
Security	<ul> <li>PCI PTS</li> <li>Anti- removal</li> <li>Anti-theft</li> </ul>	<ul> <li>PCI PTS V6 certified</li> <li>Active connector removal</li> <li>Secured lock receptacle</li> </ul>	> > > >

Terminal Connections	• HDMI	• IDMI	~
Terminal Connections via Accessories	USB     Powered USB	<ul> <li>USB Host</li> <li>USB Slave</li> <li>5V and 12V</li> </ul>	× × ×
Stand Mounting	<ul> <li>Universal Payment Mount</li> </ul>		~
Privacy PIN shield	<ul> <li>Standard privacy shield</li> </ul>	PCI PTS certified (factory mounted)	Option
Terminal Size	Terminal only	• 167x82x40mm (6.6x3.2x1.6'')	~
Terminal Weight	<ul> <li>Terminal full option without PINshield</li> </ul>	• 231g (8.1oz)	~
Environment	<ul> <li>Operating temperature</li> </ul>	• 0 to +45°C (32°F to 122°F)	~
	Storage     temperature	<ul> <li>-20 to +55°C (-4°F to 158°F)</li> </ul>	~
	Operating     humidity	<ul> <li>85% HR at +40°C (104°F)</li> </ul>	~

