

# Lane/3600

Fast, secure and compact PIN Pad solution



- Ensure best-in-class transaction flow with an extensive contactless zone
- Integrate easily with your retail environment thanks to its compact size and wide range of accessories such as standpole and kiosk adaptation plate
- Provide a user-friendly, compact terminal for easy self-checkout



ingenico



With its compact design, the Lane/3600 fits perfectly in any retail or hospitality environment.



**Optimized for payment**

- All payment methods accepted, one easy-to-identify contactless reader.

**Designed for an intensive use in retail**

- Powerful processing to increase transaction speed
- Boosted memory (Up to 512MB RAM 512MB FLASH)
- High speed processor (Cortex A7)

**Robust device for demanding retail environment**

- Display with glass lens
- High-performance card & swipe insertion.

**Easy integration into semi-attended kiosks**

- With optimized dimension and adaptation plate.

**Rear and fast QR code reader integrated camera**


- Full-integrated 0.3MP rear camera

**Highest security**

- PCI PTS v6
- Optional PCI compliant privacy shield
- Detection of abnormal cable's removal to alert and up to inhibit the terminal in case of threats
- Anti-theft Kensington lock

**Supported by Ingenico's suite of service**

- Fleet management & security solutions
- Hardware services
- Professional services

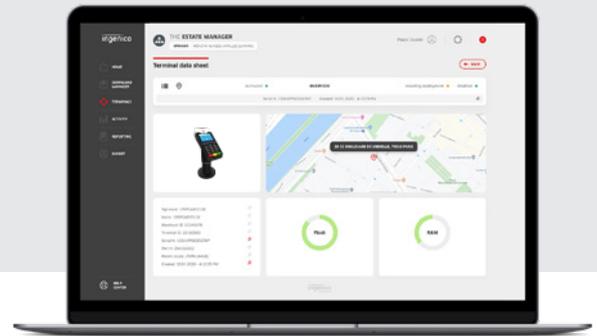

<b>Processor</b>	• Application & Crypto processor	• Cortex A7	✓
<b>Memory</b>	• Internal	• 256 MB Flash, 256 MB RAM • 256 MB Flash, 512 MB RAM	✓ Option
<b>OS</b>		• Telium TETRA	✓
<b>SAM</b>	• SAM slots	• 1	✓
<b>Card Reader(s)</b>	• Magnetic card reader	• ISO 1/2/3 (500K reads lifespan bi-directional swiping)	✓
	• Smart Card	• EMV L1 (500K reads lifespan)	✓
	• Contactless	• EMV Contactless L1 3.0 spec compliant	✓
<b>Integrated Camera</b>		• 0,3M pixels (QR code library embedded)	Option
<b>Display</b>		• 2.8" backlight, glass lens, QVGA (320x240 pixels)	✓
<b>Touchscreen</b>	• Capacitive	• Finger (1000K lifespan signature)	✓
<b>Keypad</b>	• Physical keys	• 15 keys, raised markings, backlit • 4 function keys (non-touch version) • Laser etched	✓ Option Option
<b>Audio</b>	• Buzzer • Audio Jack • Speaker	• Stereo • Mono	✓ Option Option

<b>Terminal Connections</b>	• HDMI	• IDMI	✓
<b>Terminal Connections via Accessories</b>	• Ethernet • USB	• Ethernet 10/100 base T • USB Host • USB Slave • 1 RS232 • 5V and 12 V (USB retail) • 12 V	✓ ✓ ✓ ✓ ✓ Option Option Option
<b>Stand Mounting</b>	• Universal Payment Mount		✓
<b>Privacy PIN shield</b>	• Standard privacy shield	• PCI compliant (factory mounted)	Option
<b>Color customisation</b>	• Rear casing		Option
<b>Terminal Size</b>	• Terminal only	• By standard white or black	✓
<b>Terminal Weight</b>	• Terminal full option without PINshield	• 227g (8oz)	✓
<b>Environment</b>	• Operating temperature • Storage temperature • Relative humidity	• 0 to +50°C (32°F to 122°F) • -20 to +70°C (-4°F to 158°F) • 85% HR at +40°C (104°F)	✓ ✓ ✓
<b>Security</b>	• PCI PTS • Anti-removal • Anti-theft	• PCI PTS V6 compliant • Active connector removal • Kensington lock receptacle	✓ ✓ ✓



www.ingenico.com

ingenico